



Europäisches  
Patentamt

European  
Patent Office

Rec'd PCT/A

PHNL029089  
03 MAY 2005

Office européen  
des brevets

10/533724

Bescheinigung

Certificate

Attestation

REC'D 21 NOV 2003

WIPO

PCT

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02079654.6

1B/03/4560

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts:  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Anmeldung Nr:  
Application no.: 02079654.6  
Demande no:

Anmeldetag:  
Date of filing: 07.11.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Record carrier having main file system area and virtual file system area

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G11B20/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

Record carrier having main file system area and virtual file system area

EPO - DG 1

07. 11. 2002

99

The present invention relates to a recordable record carrier having a user area for storing user data and a management area for storing management data. The invention relates further to a recording apparatus for recording information on such a recordable record carrier and a corresponding recording method. The invention relates further to a computer  
5 program for implementing said methods. In particular, the present invention relates to an optical record carrier such as a small form factor optical (SFFO) disc.

In some applications it is useful to translate the file system used on a  
10 recordable record carrier into another file system that can be exposed across a standard interface to a host that does not understand the original file system, which will be called main file system in the following, but does understand the other file system, which will be called virtual file system in the following. An example is the mounting of a rewritable SFFO disc which uses a universal disc format (UDF) file system in a CompactFlash II (CFII) form  
15 factor drive that exposes a file allocation table (FAT) file system to the host. In the following, recordable shall mean that information can be stored on the record carrier once or several times, i.e. rewritable record carriers shall be covered by this term as well.

Typically, some structures or parts of the exposed file system will be static, for instance those containing volume descriptions and basic parameters, and some other  
20 structures or parts will be volatile, for instance those detailing directories and the allocation of files. The static parts of the exposed virtual file system can be cached to the record carrier without problems. They can, for instance, be put in a dedicated file in the management data area. However, caching the volatile part of the exposed virtual file system on the record carrier is not straightforward. Many hosts and applications will not be aware of the fact that  
25 there are instances in which (part of) the address space is exposed from the drive to the outside world using an alternative (virtual) file system. In addition, it is also very often not desired that the hosts and applications are aware of this, because otherwise users and software developers could take it for granted and the host would be expected to act accordingly, i.e. maintain all associated structures. If one of the hosts or applications update

the main file system on the record carrier the cached virtual file system, in particular its volatile parts, will be inconsistent with the main file system on the record carrier.

Reconstructing the directory structure for the virtual file system, without further measures, is always a time and power consuming task. It is therefore an object of the present invention to provide a recordable record carrier, a recording apparatus for recording information thereon and a corresponding recording method by which the required time, processing and record carrier access as well as power consumption can be dramatically reduced.

10

This object is achieved according to the present invention by a recordable record carrier as claimed in claim 1 whose management area comprises

a main file system area for storing main file system data of a main file system,  
a virtual file system area for storing virtual file system data of a virtual file

15 system in raw format and

an indicator area for storing an indicator indicating if the main system data and the virtual file system data are consistent.

This object is further achieved by a recording apparatus as claimed in claim 8 comprising

- 20 - recording means for recording main file system data of a main file system in a main file system area of said management area, virtual file system data of a virtual file system in raw format in a virtual file system area of said management area and an indicator indicating if the main file system data and the virtual file system data are consistent in an indicator area of said management area,
- 25 - reading means for reading said user data and said management data,
- memory means for storing said virtual file system data,
- conversion means for converting said main file system data into said virtual file system data and vice versa for storage on the record carrier and/or for output to an external host device in case said indicator indicates an inconsistency between the main file system data and the virtual file system data and
- 30 - an interface for communicating with a host device.

A recording method for recording information on a record carrier on which originally only main file system data are stored is defined in claim 11 and comprises the steps of:

- reading main file system data of a main file system stored in a main file system area of said management area,
- converting said main file system data into said virtual file system data for storage on the record carrier and/or for output to an external host device ,
- 5 - storing said virtual file system data in a virtual file system area of said management area in raw format,
- storing an indicator indicating if the main system data and the virtual file system data are consistent in an indicator area of said management area.

10 A recording method for recording information on a record carrier on which main file system data as well as virtual file system data are stored is claimed in claim 12 and comprises the steps of:

- reading an indicator, which indicates if main file system data of a main file system stored in a main file system area of said management area and virtual file system data of a virtual file system stored in raw format in a virtual file system area are consistent, from
- 15 an indicator area of said management area,
- reading said main file system data from said main file system area and reconstructing at least part of said virtual file system data from said main file system data in case said indicator indicates a inconsistency,
- reading at least part of said virtual file system data from said virtual file system area,
- 20 - exposing the virtual file system data to an external host device.

The present invention is based on the idea to define and store an indicator on the record carrier indicating if main system data and virtual file system data which are both stored on the record carrier in particular areas are consistent or not. If the virtual file system is mounted and the main file system was updated since the last time the structures of the virtual file system were cached, the virtual file system needs to be reconstructed from the main file system stored on the record carrier. If, however, the virtual file system is mounted and the main file system was not updated since the last time the structures of the virtual file system were cached, the virtual file system is completely retrieved from the record carrier. This prevents the need to reconstruct the virtual file system from the main file system,

25  
30 dramatically reducing time, processing and record carrier access required, and thus reduces the power consumption.

According to the invention the virtual file system data are stored on the record carrier in a raw format. This means that the virtual file system data are stored in an optimised way to reduce the required memory space. Compared to the main file system data stored in

the normal format on the record carrier, less memory space is needed since, for instance, much of the padding is removed.

The user area and the management area are not necessarily contiguous, they can be interleaved and/or part of the management data area, e.g. the virtual file system area, can be a file in the main file system area, or the space occupied by the virtual file system data can be removed from the address space presented to the main file system.

According to a preferred embodiment the static and volatile parts of the virtual file system data are stored in separate entities on the record carrier, in particular in a static area and a volatile area of the virtual file system area. This further reduces the required time and power consumption in case the indicator indicates an inconsistency between the main file system data and the virtual file system data. In this case, only the volatile parts have to be reconstructed from the main file system data stored on the disc while the static parts of the virtual file system data can be retrieved from the record carrier but need not be reconstructed from the main file system data which would require an additional time and power consumption. In case there is no inconsistency both the static and the volatile parts of the virtual file system data are retrieved from the record carrier, and no reconstruction from main file system data is required.

Tracking whether the main file system data has been updated can be implemented by several measures. According to a preferred embodiment the indicator comprises the last update date of the main file system data and of the virtual file system data. Comparing the dates reveals if the cached virtual file system data, or at least the cached volatile parts thereof, are still valid or if there is an inconsistency. According to an alternative embodiment, as claimed in claim 4, at the time of updating and caching of the virtual file system data a flag is set which indicates that the virtual file system data are valid. This flag is updated or reset when the main file system data are updated independently, but not the virtual file system data, thus indicating that the virtual file system data are invalid and that there is a high risk of an inconsistency.

Preferably the indicator area is located at an - for the drive - easy accessible location on the record carrier. Such locations include for instance a disc navigation (DN) area, the logical volume integrity descriptor (LVID) or a chip in the record carrier, for instance a chip in disc. For instance, the last update date of the main file system data can be retrieved from the time stamp of the LVID, and the indicator can be stored in the ImplementationUse field in the ImplementationUse area of the LVID. The LVID is a

structure specific to UDF. The LVID will automatically be updated even by a non-aware UDF implementation.

According to another preferred embodiment the virtual file system area further comprises a directory area for storing the directory structure of the virtual file system. Since  
5 reconstructing the directory structure can be a time and power consuming task, this much reduces the time when retrieving and using the virtual file system data. This directory information is in this form not part of the original specification of the virtual file system, also the directory information written using the main file system is not present on the record carrier in this format optimised for use with the virtual file system. The location of these data  
10 may need to be faked by mapping it on top of the main file system structures which are not accessed directly by the virtual file system. This measure is also of benefit if the virtual file system data are isolated from the main file system data, i.e. if the virtual file system data are located in a dedicated image. The virtual file system data can be in a file in the user area described by the main file system. Foreign file systems, e.g. the virtual file system, may be  
15 embedded in a file of another file system, e.g. of the main file system. This file is usually called an image.

The present invention is preferably applied on an SFFO disc which preferably uses as main file system a UDF file system and as virtual file system a FAT file system. When applying the invention all data needed to browse the SFFO disc without actually  
20 accessing files is cached, thus dramatically improving mount times and the power required to mount the virtual file system, especially if the UDF was not updated or is not relevant, in case of a dedicated virtual file system image. In the latter case the files in the virtual file system area are not specified separately in UDF. In addition, the proposed invention enables the exposure of the virtual file system in an optimal way without putting any burden on the  
25 main file system.

The invention will now be explained in more detail with reference to the drawings in which

30 Fig. 1 shows a block diagram of a recording apparatus according to the present invention,

Fig. 2 shows a flow chart of a first embodiment of the recording method according to the present invention,

Fig. 3 shows a flow chart of another embodiment of a recording method according to the present invention,

Fig. 4 shows a disc and memory layout and the steps of the recording method according to the present invention, and

5 Fig. 5 shows the disc layout and the steps of another embodiment of the recording method.

Fig. 1 shows a recording apparatus 1 according to the present invention to which two host devices 2 and 3 are connected. For communication with said host devices 2, 3 the recording apparatus 1 comprises interfaces 4 and 5. Further, the recording apparatus 1 comprises recording and reading means 6 for recording information to a recording medium 7 and for reading information from said medium 7, e.g. an optical disc. Said medium 7 has user area UA for storing user data and a management area MA for storing management data. It generally uses a main file system mFS, e.g. a UDF file system, which is stored in a main file system area 70. Via the interface 5, e.g. an ATAPI interface, host devices 3 which can interpret the main file system mFS can communicate with the recording apparatus 1 and use the recording medium 7.

However, for legacy host devices, such as host device 2, which can not interpret the main file system, an additional virtual file system vFS is required for communication between the host device 2 and the recording apparatus 1 via the interface 4, which is for instance a CFII interface. Such virtual file system data vFS are stored in memory means 8 in the recording apparatus 1. For conversion of the main file system data mFS stored on the record carrier 7 into the virtual file system data vFS stored or to be stored in the memory unit 8 or vice versa a conversion unit 9 is provided in the recording apparatus 1. Thus, the virtual file system data vFS, for instance FAT file system data, can be exposed across the interface 4 to the host device 2.

At least part of the virtual file system data vFS are also stored on the record carrier 7 in a particular virtual file system area 71. This is generally not the virtual file system itself but information derived from it or virtual file system data in a raw format. Such raw data do not enable the host device 2 to use the virtual file system to access the record carrier 7, but are provided on the record carrier to optimise the conversion process from the main file system to the virtual file system. Further, the stored part of the virtual file system does generally not cover all of the files on the record carrier at all times as the main file system



does. Preferably a distinction is made between volatile and non-volatile data of the virtual file system data vFS.

Still further, an indicator ID is additionally stored on the record carrier 7 in a particular indicator area 72. This indicator ID is used to indicate if the main file system data mFS and the virtual file system data vFS are consistent or not.

The function of the recording apparatus 1 and the recording method according to the present invention will now be explained in more detail. Fig. 2 shows a flow chart of a first embodiment of a recording method. In a first step S10 main file system data mFS which are already provided on the record carrier are read therefrom. Such main file system data mFS are thereafter in step S11 converted into virtual file system data vFS if the record carrier 7 is mounted for the first time in the recording apparatus 1. Such virtual file system data vFS are in the subsequent step S12 stored in memory 8 as well as, at least partly, on the record carrier 7 in a virtual file system area 71. Finally, in step S13, the indicator ID indicating in this case consistency between the main file system and the virtual file system is stored in the indicator area 72.

Another embodiment of the recording method according to the present invention which takes into account that already virtual and main file system data are stored on the record carrier is shown in the flow chart of Fig. 3. In a first step S20 the indicator ID is read from the record carrier and evaluated in step S21. In case the indicator ID indicates that the main file system data mFS and the virtual file system data vFS are consistent the virtual file system data vFS are completely read from the record carrier (S22) and outputted (S23) so that a host device using the virtual file system can access the record carrier.

In case the indicator ID indicates an inconsistency in step S21 at least part of the main file system data mFS are read (S24) from the record carrier and thereafter converted (S25) into virtual file system data vFS which are finally again outputted (S23). Thus, only in cases in which there is an inconsistency the virtual file system needs to be reconstructed from the main file system, which dramatically reduces time and power consumption in this case.

Fig. 4 shows the disc layout and the memory layout and illustrates the steps of another embodiment of a recording method according to the present invention. In the first line the layout of the logical volume of an optical rewritable disc 7 is shown. It comprises a lead-in area LIA including the lead-in LI and disc navigation data DN, a lead-out area LOA including the lead-out LO and a program area PA including user data, main file system volume structures such as an UDF volume and main file system file entries such as UDF file entries UDF FE.

The main file system data consist of volume descriptors in a contiguous space at the beginning of the program area PA and file descriptors that can be scattered throughout the remaining program area PA, for instance interleaved with actual user data, i.e. files, or, preferably in a contiguous area, which is in case of SFFO preferably located at the end of the program area.

The user area UA and management area MA, described above and shown in Fig. 1, are not necessarily contiguous, they can be interleaved and/or the virtual file system data area, which is part of the management data area, can be a file in the main file system data area, or the space occupied by the virtual file system data area can be removed from the address space presented to the main file system.

If the disc 7 is mounted for the first time in a FAT enabled CFII drive the UDF, i.e. the main file system data, will be read and translated (S30) in the drive (above referred to as the recording apparatus 1) to FAT. The static parts are mainly derived from the UDF volume structures, the volatile parts are mainly derived from the UDF file entries. The obtained FAT, in particular its static part, volatile part and directory structure, are stored in the memory 8 and can be exposed across the CFII interface 4.

Upon unmount of the disc the constructed FAT is translated (S31) back into the UDF and written to the disc 7. An additional indicator is stored on the disc 7, for instance on an easy accessible location, such as an indicator area ID in the disc navigation area DN, indicating if the cached FAT is valid or not. Alternatively or in addition the last update date for the FAT and of the UDF can be recorded on the disc 7, e.g. in the disc navigation area DN so that a comparison of these dates reveals if the cached FAT is still valid. Still further, said indicator can be implemented using the logical volume integrity descriptor LVID, for instance by retrieving the last update date of UDF from the time stamp in the LVID and/or by including a flag that indicates that the cached FAT is valid in the ImplementationUse field in the ImplementationUse area of the LVID.

If the UDF is supposed to cover files added during the FAT operation the UDF on the disc 7 also needs to be updated which can, however, be delayed until the next dismount or until the next mount under UDF. If before the next mount of FAT the UDF has not been changed, then it can be ignored and only the FAT memory structures stored on the disc 7 are loaded into the memory 8 as shown in the last two lines of Fig. 4.

If before the next mount of FAT the UDF has been changed then only the static part of the FAT are retrieved from the disc 7 directly, e.g. from a static area within the disc navigation area DN and/or the UDF volume, while the volatile part of the FAT is

reconstructed from the UDF on the disc 7 as shown in Fig. 5. The FAT starts at the beginning of the storage space. The generated FAT image is then mapped over the UDF volume space as shown in Fig. 5, last line.

The drive checks the inconsistency flag. If not raised the drive reads the  
5 cached vFS directly into memory. If raised the drive mounts the mFS, reads at least the static part of the vFS and reconstructs the new situation for the vFS. Then the data area is exposed with FAT virtually mapped, as shown in Fig. 5, to the beginning of the address space. Physical block number 0, i.e. the beginning of the UA, is logical block number 0 within FAT. The data area of the FAT file system starts at the beginning of the UDF partition (logical  
10 block number 0 for UDF), which is usually directly following the area with the UDF volume structures. It should be noted that it is possible to change UDF without making it inconsistent with FAT, e.g. by changing an extended attribute, which is not a known concept to FAT.

The indicator can be recorded on different locations such as the disc navigation area, e.g. in a separate structure such as an indicator area, with the static parts of  
15 the virtual file system (FAT), in a chip in disc or in MRAM (magnetic random access memory) in the drive. Further, the directory structure of the virtual file system can also be recorded on the disc to save time and power consumption during reconstruction of the virtual file system.

A particular implementation of the invention shall now be explained. The  
20 invention can be applied on a SFFO disc which is mounted in a CFII form factor drive in a digital camera. In memory the UDF is translated into FAT, generating static FAT structures, e.g. the boot record, which are written to disc and also generating the FAT tables and a representation of the directory structure. The drive exposes a FAT based CFII interface to the digital camera. Still images are transferred from the camera to the SFFO disc. The FAT  
25 structures are updated in memory. Dirty flags indicating that the content of the structures the dirty flags are related to is not verified or guaranteed to be consistent, are set for each added file and FAT as a whole.

If before the drive is ejected the batteries of the camera run out no problem  
arises for the SFFO drive since an NVRAM, preferably MRAM, is used as memory. As soon  
30 as the camera has new batteries the drive does a consistency check. Upon dismounting the drive the volatile parts of FAT, in particular FAT tables and FSInfo structure, are written to disc as well as the directory information. The FAT allocation is translated into UDF structures for the new and updated files. The UDF on SFFO is updated. Part of the latter

update is writing the LVID. In the ImplementationUse field of the ImplementationUse area of the LVID it is written that the cached FAT is valid.

Next time the FAT is mounted it will check the LVID for the CachedValid indicator. If it is present, both the static in volatile part of FAT are retrieved from disc, as  
5 well as the directory information. If it is not present it means that some UDF implementation has written the LVID last and that the FAT and directory structures need to be reconstructed from the UDF on disc. Thus, by use of the present invention, a drastic reduction of mount times and energy required for mounting the virtual file system can be achieved.

## CLAIMS:

07.11.2002

(99)

1. Recordable record carrier having a user area for storing user data and a management area for storing management data, said management area comprising  
a main file system area for storing main file system data of a main file system,  
a virtual file system area for storing virtual file system data of a virtual file  
5 system in raw format and  
an indicator area for storing an indicator indicating if the main system data and the virtual file system data are consistent.
2. Record carrier as claimed in claim 1, wherein said virtual file system area  
10 comprises a static area for storing static parts of said virtual file system data and a volatile area for storing volatile parts of said virtual file system data so that in case the indicator indicates an inconsistency between the main file system data and the virtual file system data only the volatile parts of the virtual file system data need to be reconstructed from the main file system data.
- 15 3. Record carrier as claimed in claim 1, wherein said indicator comprises the last update date of the main file system data and of the virtual file system data.
4. Record carrier as claimed in claim 1, wherein said indicator comprises a flag  
20 which is set when the virtual file system data are updated indicating that the virtual file system data are valid and which is reset when the main file system data are updated independently indicating that the virtual file system data are invalid.
5. Record carrier as claimed in claim 1, wherein said indicator area is located at  
25 an easy accessible location, in particular in a disk navigation area, in an logical volume integrity descriptor or a chip in the record carrier.
6. Record carrier as claimed in claim 1, wherein said virtual file system area further comprises a directory area for storing the directory structure of the virtual file system.

7. Record carrier as claimed in claim 1, wherein said main file system is a Universal Disc Format file system and wherein said virtual file system is a File Allocation Table file system.

5

8. Recording apparatus for recording information on a recordable record carrier having a user area for storing user data and a management area for storing management data, said apparatus comprising

- 10 - recording means for recording main file system data of a main file system in a main file system area of said management area, virtual file system data of a virtual file system in raw format in a virtual file system area of said management area and an indicator indicating if the main file system data and the virtual file system data are consistent in an indicator area of said management area,
- reading means for reading said user data and said management data,
- 15 - memory means for storing said virtual file system data,
- conversion means for converting said main file system data into said virtual file system data and vice versa for storage on the record carrier and/or for output to an external host device in case said indicator indicates an inconsistency between the main file system data and the virtual file system data and
- 20 - an interface for communicating with a host device.

9. Recording apparatus as claimed in claim 8, wherein said recording means and said reading means are adapted for accessing an optical disk, in particular a small form factor optical disk, using a universal disc format and wherein said interface is adapted  
25 communicating with a compact flash form factor drive using a file allocation table system.

10. Recording apparatus as claimed in claim 8, wherein said memory means comprise a MRAM unit.

30 11. Recording method for recording information on a recordable record carrier having a user area for storing user data and a management area for storing management data, said method comprising the steps of

- reading main file system data of a main file system stored in a main file system area of said management area,

- converting said main file system data into said virtual file system data for storage on the record carrier and/or for output to an external host device,
- storing said virtual file system data in a virtual file system area of said management area in raw format,
- 5 - storing an indicator indicating if the main system data and the virtual file system data are consistent in an indicator area of said management area.

12. Recording method for recording information on a recordable record carrier having a user area for storing user data and a management area for storing management data,  
10 said method comprising the steps of

- reading an indicator, which indicates if main file system data of a main file system stored in a main file system area of said management area and virtual file system data of a virtual file system stored in raw format in a virtual file system area are consistent, from an indicator area of said management area,
- 15 - reading said main file system data from said main file system area and reconstructing at least part of said virtual file system data from said main file system data in case said indicator indicates an inconsistency,
- reading at least part of said virtual file system data from said virtual file system area,
- exposing the virtual file system data to an external host device.

20

13. Recording method as claimed in claim 12, further comprising the steps of
- setting the indicator such that it indicates an inconsistency in case the virtual file system data and/or the main file system data are changed, and
  - storing the set indicator in said indicator area.

25

14. Computer program comprising computer program means for causing a computer to perform the steps of the method as claimed in claim 11 or 12 if said computer program is run on a computer.

## ABSTRACT:

07.11.2002

(99)


The present invention relates to a recordable record carrier having a user area (UA) for storing user data and a management area (MA) for storing management data. The invention relates further to a recording apparatus for recording information on such a record carrier and a corresponding recording method. In some applications it is useful to translate the main file system into an alternative virtual file system. To reduce the mount times and power consumption needed for reconstruction of the virtual file system it is proposed that the management area (MA) comprises a main file system area (70) for storing main file system data (mFS), a virtual file system area (71) for storing virtual file system data (vFS) in a raw format and an indicator area (72) for storing an indicator (ID) indicating if the main system data (mFS) and the virtual file system data (vFS) are consistent. Only in case the indicator (ID) indicates an inconsistency the virtual file system data (vFS) need to be reconstructed from the main file system data (mFS) if the virtual file system data (vFS) is required by an application. Otherwise the virtual file system data (vFS) can be directly retrieved from the record carrier without reconstruction.

(Fig. 1)



07. 11. 2002

99

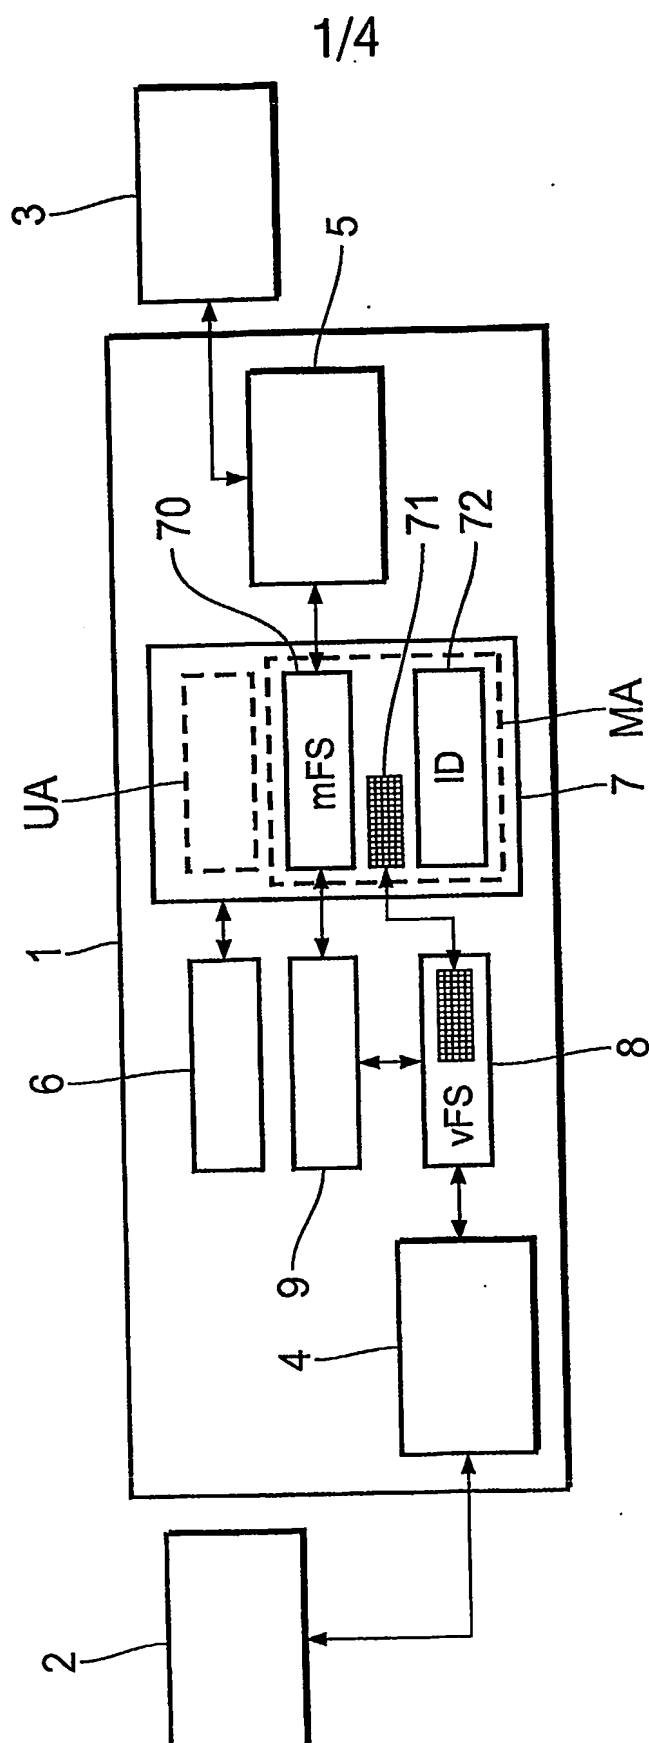

**FIG. 1**

2/4

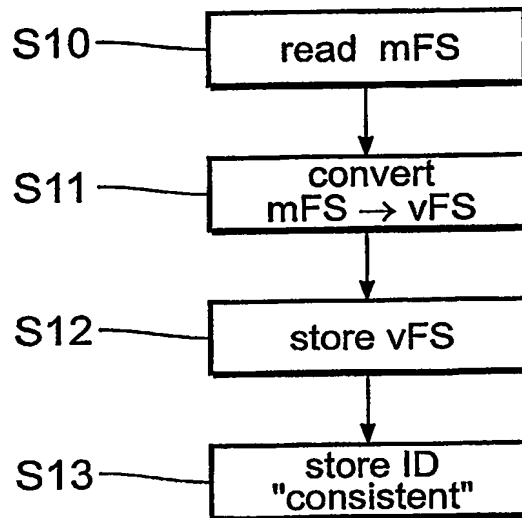


FIG.2

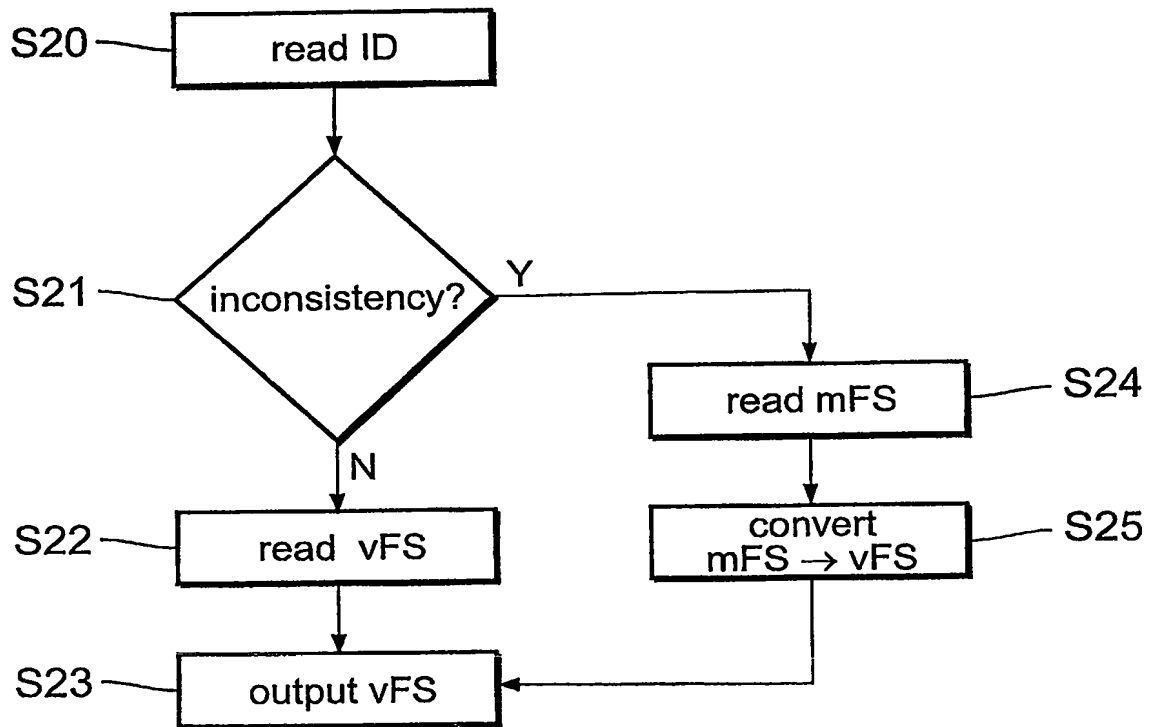


FIG.3

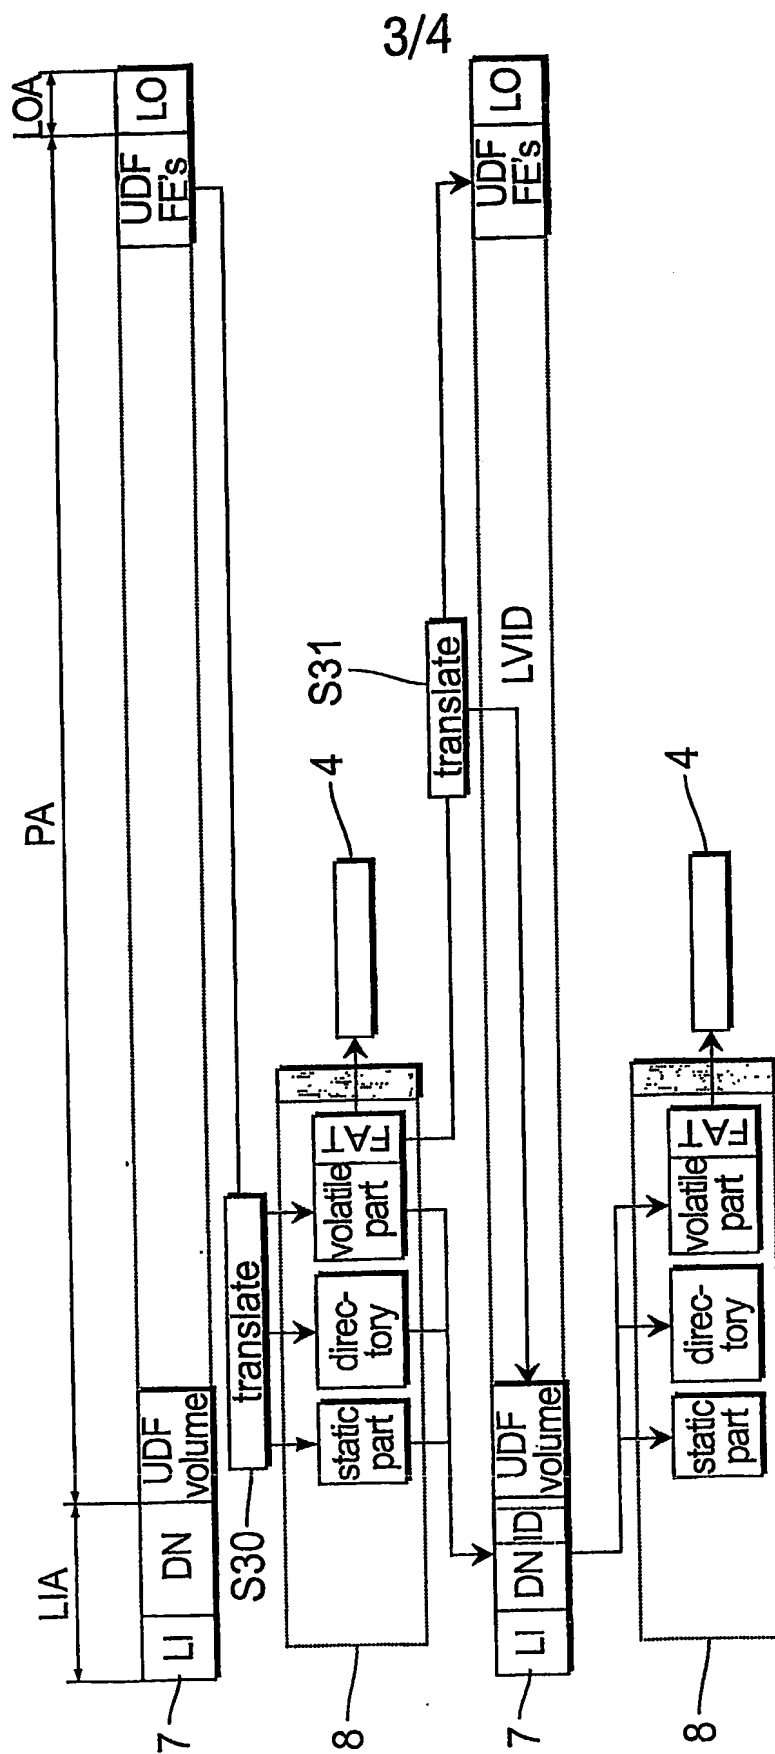


FIG.4

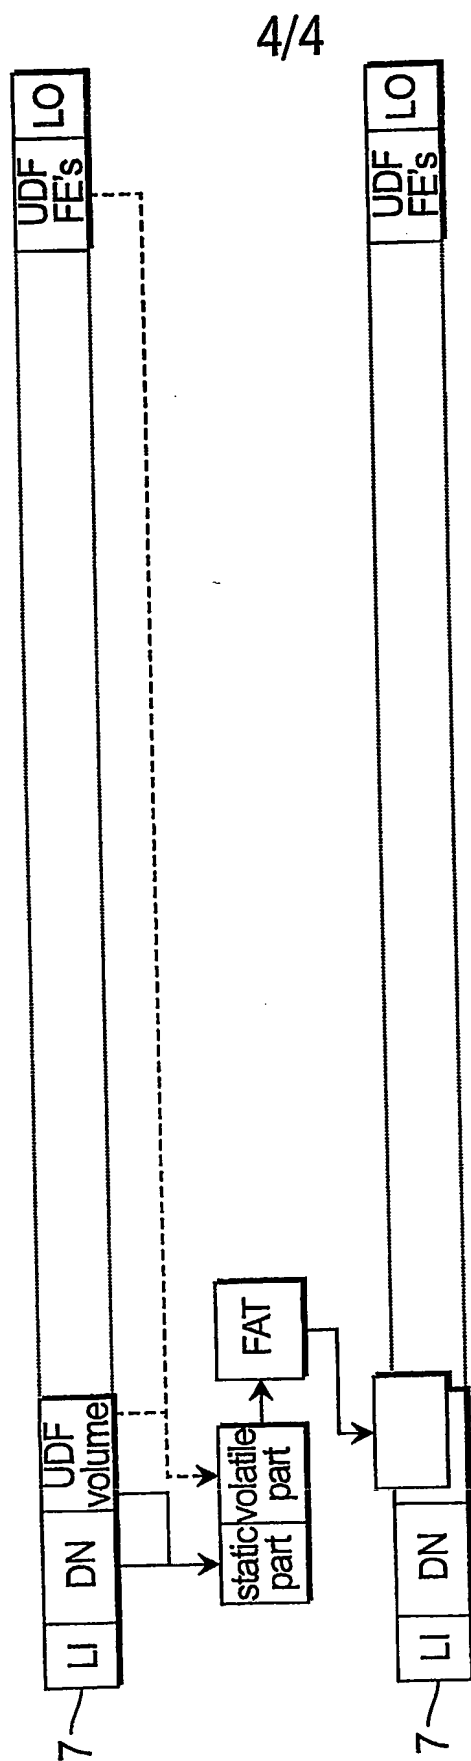


FIG.5